

Native IP Device

Connect to your IP network.
Simple to install and easily configured with a
Web browser

Power over Ethernet

Single cable deployment. No Mains
required

Direct Control From NGx Consoles


Fingertip dimming and On/Off control.
From NGX console application, NGxVision
and NGxView.

On-Board Sensors

Optional sensors for presence detection.
Lux sensors can be connected to and
Netgenium device with digital inputs.

Policy Based Lighting

With Netgenium PolicyServer

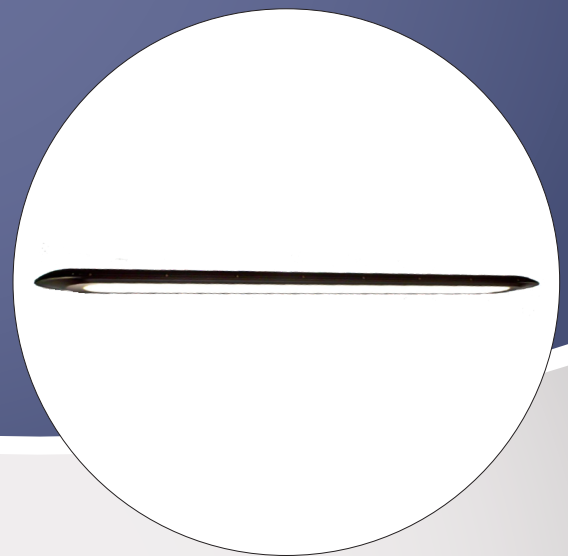

ALDN35W-IP

A robust LED fixture for overhead lighting applications suitable for interior or exterior use, requiring NO mains power. Typical applications include under canopy lighting, walkways, garages, storerooms, warehouses etc.

Connection directly to a PoE Ultra Switch port, the ALDN35W-IP provides excellent energy savings combined with a long life, high lumen output and easy installation and supplied with either wire suspension or saddle fix with bolt.

Available in two colour casing options Black or Silver, two colour temperatures and in two power options.



ALDN35W-IP

IP LED Lighting Connection

Technical Data

Model No:

ALDN35W-IP

Connectivity:

1 No. 10/100 Base TX Ethernet RJ45

Lumen per Watt:

66 lm/W (Dimmable)

Management/Configuration:

Web Browser

Features:

Optional PIR

Power Supply:

Power over Ethernet (PoE Ultra 60W)

Max overall load 35W

Dimensions:

1180mm x 145mm x 65mm

Optional Mounting Kit:

Stainless steel wires and fixings Ceiling/Wall mount stainless steel brackets

Environment:

Environment Temperature -20 C ~ +45 C



IP Devices
Access, Security, Audio & Lighting Control

18A White Rose Way
Follingsby Park
Gateshead
Tyne & Wear
NE10 8YX

T: +44 (0) 845 9011148
F: +44 (0) 845 9011149
E: sales@netgenium.co.uk
W: www.netgenium.co.uk

©Netgenium Systems 2014